



Family Owned Motorsports Lighting Since 1989!

## INSTALLATION GUIDE

### AIRSTREAM TRAILER UNDERGLOW LED LIGHT KIT

IMPORTANT! No two installation scenarios are the same. Accent lighting is highly subjective. Not everyone shares the same lighting or installation quality goals. Some folks are OK with twisting wires together, others want to solder and heat shrink them. Some folks are OK with running wires where they may be seen or unprotected to save money/time, others want a tidy, clean install so they wrap plastic split-loom around all exposed cables. Some folks are OK with mounting their LED strips to whatever surface they can find, others want to take the time necessary to build out appropriate mounting surfaces to provide the best lighting effect on their vehicle and maximize the longevity of their lighting system. The point is it's not possible to provide all the materials necessary for all installation scenarios on all types of vehicles to meet everyone's quality goals. Our light kits provide the essential components needed for a high-quality, functioning lighting system. Installation of our light kit to your specific vehicle will however likely require additional items to make it look, fit and work the way you want. This is particularly the case with electrical wiring, switching functionality and mounting surfaces for the LED strips. We have created a list of additional items you may need. Here's the link:

<https://www.boogeylights.com/other-items-you-might-need/> . While we offer them for sale you can also find these items locally. We urge you to review this information before starting your install.

### BENCH TEST YOUR LIGHTING COMPONENTS FIRST!

We know this takes a few extra minutes, but we STRONGLY suggest you bench test your lights AND your controller / switches on a table before doing anything further. Test all of them. While we test every light strip and controller before shipping, bench testing your lights will eliminate the possibility of any problems with the lights or controller before mounting. It also lets you know everything is working properly. Also, the process of bench testing gives you an opportunity to understand the wiring system without interference from other wires, connectors and cables. You can use any good 12vdc battery to do this (e.g. car battery, motorcycle battery, lawn tractor battery or 12vdc power supply capable of supporting a 5 amp load). If you're not sure how to do this, we have prepared a document explaining the process here: <https://docs.boogeylights.net/?wpdmdl=1305> . Bench testing takes an extra 10 or 15 minutes. It's simple to do and can potentially save you hours of time and frustration down the road.

Did we mention the importance of bench testing every LED strip and controller before installing?

## BEFORE YOU START

**THIS IS A GUIDE. NOT A HOW-TO.** It's simply not possible to provide detailed instructions for all installation scenarios. Far too many variables. The information in this manual is intended to be used as a guide. It is not a detailed step-by-step how-to installation manual. We do not spell out every single step along the way. We cover the essential steps related to installing this kit. Beyond that we assume the installer has the skills, knowledge and tools necessary to do the work using the information we provide as a guide. You may need to vary your installation and/or make adjustments based on your truck. This is particularly the case with electrical wire routing, electrical connections, electrical load sizing and switching. If you're unsure about how to do the installation – particularly the electrical components – we urge you to seek assistance from someone who has those skills.

**YOU MUST HAVE AN UNDERSTANDING OF 12V POWER.** An essential skill with installation of any Boogey Lights LED products is knowing how to correctly wire the product to a 12vdc circuit. This includes understanding the importance of having a properly sized fuse at the power source, polarity, how to properly seal an electrical connection, using properly sized wire gauge for the load, measuring voltage and measuring the additional amperage draw you're adding. If you are uncertain or unfamiliar with any of these concepts, we urge you to ask someone who has the knowledge to assist you. Electricity is unforgiving.

**WORK AREA.** Make sure you have ample area in which to work and that the area is protected from rain or cold temperatures. The 3M adhesive tape and 3M adhesion promoter works best if applied when the air temperature is above 40 degrees (and of course is DRY).

**KNOW YOUR AMPERAGE DRAW.** Pay attention to the number of LEDs you are lighting and the total amps you will be drawing. We manufacture a number of LED Controllers of varying capacities. If you over-load the LED controller, it will either not work at all or the lights will dim in a short period of time. Amperage data for all our LED products are on each product page. You can also download it directly here: <https://docs.boogeylights.net/?wpdmdl=1137>

**THE INSTALLATION.** Installation of this led light kit takes 8 to 10 hours depending on whether or not you're installing the Rock-Guard light kit and/or the LED Controller for multi-color LED control.

For the trailer under-glow portion there are nine different mounting locations in this kit and all of the power leads need to be carefully run up to the front of the trailer where we mount our LED controller in the battery box. In some cases it might be necessary to add some aluminum or plastic flat bar if the bottom of your trailer doesn't have a suitable smooth, flat mounting surface. That said, our experience with Airstream trailers is you will not need to add aluminum flat bar as long as the bottom of your trailer is clean, smooth and flat. This makes the installation easier and quicker to complete.

If you're adding the rock-guard lights, there are eight additional LED strips (four per rock guard) that need to be mounted under each rock-guard panel (driver's and passenger's side). For multi-color RGB configurations, the LED strips mounted under the trailer are typically wired to ZONE 1 on the LED controller. The rock-guard area LED strips are typically wired to ZONE 2 on the LED Controller. This of course assumes you're installing our DUAL ZONE LED Controller. If not, all of the LEDs will need to be wired to a single zone (or, controlled by a hard wired switch of some kind).

## **A Word About Battery Power**

One 16' LED strip (300 LEDs) will consume about 3.5 amps on full power brightness (white, max brightness setting). On other colors and lower brightness settings the consumption is considerably less. While most people do not use this max brightness setting for long periods of time, you still need to make sure the 12vdc power source you're using is not only capable of powering the load you're adding, it needs to be able to sustain that load over time. Not all RV chargers/converters/inverters are sized to handle the additional 12vdc electrical load you're now adding to your system. If your batteries and/or converter isn't sufficient to handle the load, the first thing you'll notice is the lights will dim quickly after turning on. Or, they might dim over the course of an hour or so. You can find more information about this issue in our Trouble Shooting Guide here: <https://www.boogeylights.com/trouble-shooting-guide/>.


## **Selecting the Location for Your LED Controller**

As we mentioned previously, we recommend mounting the LED CONTROLLER in the same compartment as your house batteries. This isn't essential but it generally is the most convenient and easiest to do. That said, nothing says you have to mount it there. If you do decide to mount your LED Controller in another location, here are some things to keep in mind:

- While water resistant, the LED controller is not intended to be submerged in water. Mount it someplace where it will not be subjected to the elements.
- Make sure there is enough air flow around the controller. Do not mount it inside a small sealed box without adequate air flow. Doing so will almost certainly mean the controller will shut down (or the lights will dim) when it gets too hot.
- The wireless remote control operates using radio signals (RF or Bluetooth depending upon the model). Where you mount the controller can impact the effective range of the wireless RF remote. For example, mounting the controller near other radio devices (e.g. wireless access point) or mounting it in a compartment that is encased in metal will likely impact the effective range of the remote control. If you're concerned about the reception, we suggest doing some testing of where you mount the controller before permanently mounting it. Our Dual Zone LED controller includes an extended antenna for situations where the effective range of the RF hand held remotes is reduced due to the location where the LED controller is mounted.

## Cutting Your LEDs

If you need to cut your LED strip you can do so as long as you cut in the proper location – which is every three LEDs as shown in the below photo. Cutting incorrectly could damage your lights and is not covered by the warranty. If you cut the strip, be sure to seal the cut end. You can use heat shrink or silicone found at your local hardware or RV store. If you do need to cut your LED strip, we strongly suggest doing so BEFORE you mount the strip.

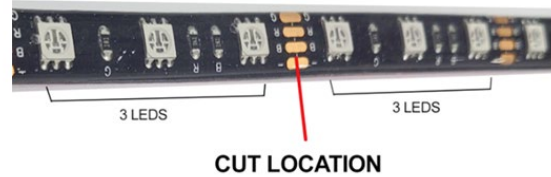

## Mounting Your LEDs

- The area where you are mounting the LEDs must be clean: free of all dirt, oil or anything that might affect the LED from sticking. You only get one opportunity to mount the LEDs so it's critical the area be prepared properly.
- Use rubbing alcohol to clean the area where you are going to mount the LED strip. Be sure to let the alcohol dry completely before proceeding to the next step. (Note: Do not use acetone or similar cleaner).
- Next, use the 3M Adhesion Promoter supplied with your kit to "paint" on the promoter where you are going to mount the LED strip. **This is an important step. Do not bypass.** Allow the promoter to dry for 60-90 seconds.
- Peel off the red backing tape that protects the 3M adhesive tape on your LED strip. Be careful not to let the tape touch anything. The 3M backing tape on these LED strips are one-use only. They cannot be reused.

Do NOT bend the LED strip in a radius of less than 2 inches.



Do NOT bend the LED strip on a horizontal plane.



Carefully push the LED strip to the area you have prepared. You will want to apply only enough pressure to the strip to make sure it is firmly mounted. *You only get one opportunity to do this.* Once the LED strip touches a properly prepared surface that has been promoted, that LED strip will be very difficult to remove. Moreover, if you do remove the LED strip, the strip cannot be used again without adding another layer of 3M adhesive tape to the back.

DO NOT press too hard as too much pressure can damage the LEDs and connecting wires in the strip. Also, do not pull, stretch or twist the LED strip. Too much tension on the strip will also damage the LEDs such that some of the LEDs in the strip will not illuminate. The strip must be mounted flat against a single continuous mounting surface, in a straight line. Really important that the ENTIRE STRIP be stuck to the mounting surface and that you NOT attempt to span across multiple mounting surfaces.

## LED PLACEMENT

We recommend mounting the LED strips as indicated on the diagram on the next page (note: the red line on the layout diagrams indicates where the feeder cable is required.) That said, nothing says you have to follow this layout exactly. If your trailer for example isn't the same exact layout or dimensions you can adjust and/or cut (or even add strips) if you want. Regardless, before proceeding, it's super important to understand that these LED strips cannot be mounted in such a way as they span multiple surfaces. They must be mounted on a smooth, flat, continuous rigid mounting surface. Spanning two mounting surfaces on a vehicle that moves, flexes and vibrates will absolutely not work. The LED strip will fail and they will do so sooner rather than later; we can almost guarantee it. We know the temptation is there because it's easy/fast to do BUT you're going to be disappointed if you do. Mounting the LED strip across multiple surfaces will void the warranty as well. Also, do not attempt to mount the strip to follow a radius. The LED strip has to be mounted in a straight line.

We have a number of installation related videos on our website (and Youtube channel) which many customers find helpful. Here are some links (they can also be found on our INSTALLATION RESOURCES page). Even though some of the videos might not be of an under-glow kit install for your specific RV model, the wiring and LED controller mounting are similar for most all installations.

<https://www.boogeylights.com/how-to-videos/>

<https://www.boogeylights.com/video-how-to-install-led-awning-light-on-any-travel-trailer/>

<https://www.boogeylights.com/video-how-to-install-a-boogey-lights-multi-color-under-glow-led-light-kit/>

You can also view additional videos on our Youtube channel here:

<https://www.youtube.com/c/BoogeyLightsLEDs/>

**SUGGESTION:** Before closing/wrapping all electrical connections we strongly suggest testing the lighting system. Nothing is more frustrating than closing up all connections, making it look nice only to find out moments later something isn't working correctly. Don't ask us how we know.

## Additional Resources

- Product Page: <https://www.boogeylights.com/airstream-trailer-under-glow-led-light-kit/>
- How to Videos: <https://www.boogeylights.com/how-to-videos/>
- Building a mounting surface: <https://www.boogeylights.com/video-creating-a-smooth-mounting-surface/>
- Using Aluminum Channels - <https://docs.boogeylights.net/?wpdmdl=1351>
- General installation: <https://www.boogeylights.com/video-how-to-install-a-boogey-lights-multi-color-under-glow-led-light-kit/>
- Troubleshooting: <https://www.boogeylights.com/trouble-shooting-guide/>
- Installation Resources: <https://www.boogeylights.com/installation-resources/>
- GEN2 LED Controller Wiring Diagrams + Operating Info: <https://docs.boogeylights.net/?wpdmdl=1163>
- GEN2 RF Wireless Remote Operating Info: <https://docs.boogeylights.net/?wpdmdl=1164>
- GEN2 Bluetooth APP Operating Info: <https://docs.boogeylights.net/?wpdmdl=1169>
- GEN2 Bluetooth APP Quick-Start: <https://docs.boogeylights.net/?wpdmdl=1167>
- Amperage Data: <https://docs.boogeylights.net/?wpdmdl=1137>

## Support

- Phone: 800.847.1359 (M-F, 9-6 Eastern)
- Text: 859.955.8155
- Open a Support Ticket: <https://www.boogeylights.com/email-us/>
- Online: 24/7 resources at <https://www.boogeylights.com/installation-resources/>
- How to Make a Warranty Claim: <https://www.boogeylights.com/make-a-warranty-claim/>


## Warranty

The Boogey Lights® warranty requires an original sales receipt from Boogey Lights or an authorized dealer. It covers product replacement only, not labor or other costs. Register your purchase at: <https://www.boogeylights.com/warranty-registration/>. Full details: <https://www.boogeylights.com/warranty/>.

# UNDER-GLOW FULL PERIMETER | 26' U AIRSTREAM TRAILER

## Forward Door

(not to scale, for general placement demonstration only)

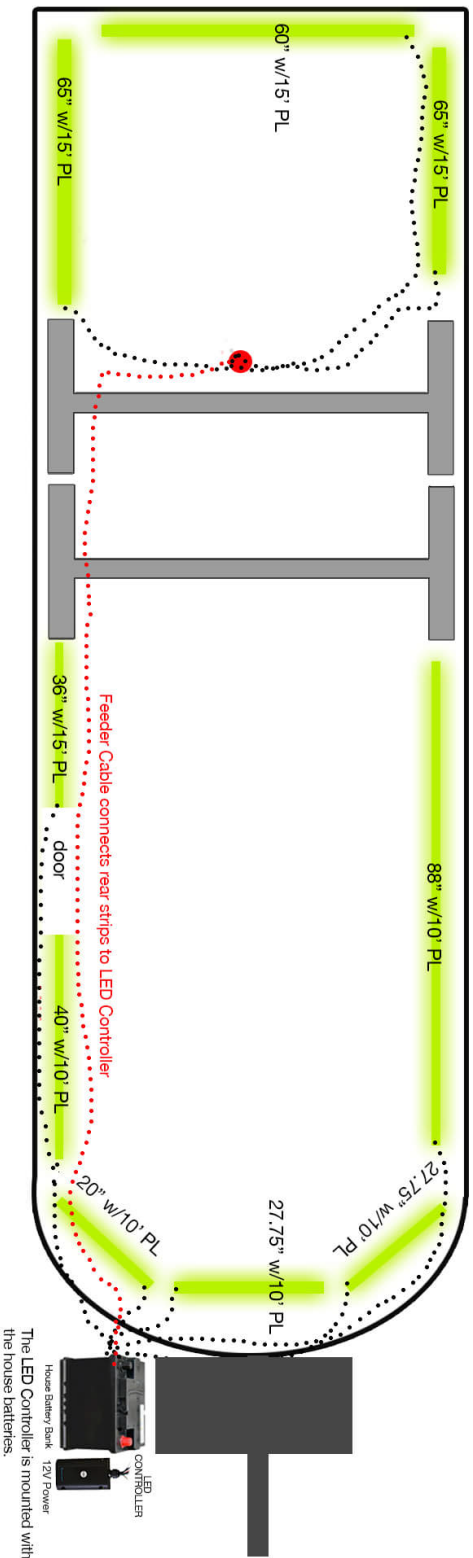

All power leads must run back to the Boogey Lights LED controller mounted at or near the 12vdc power source. We always recommend using the house batteries as the power source. **IMPORTANT!** LED strips can not "daisy chain" from one strip to the next. NOTE: LED Strips can be cut every third LED if you need shorter lengths.

### IF DUAL ZONE

ZONE 1: The trailer under-glow power leads are connected to zone 1.  
 ZONE 2: The rock-guard LEDs are connected to zone 2.

Not all models have the door in the front like this 30' trailer. If your trailer doesn't, we can adjust the LED Lengths to fit. Contact us with your measurements for the passenger's side lengths.


15 January 2024



# UNDER-GLOW FULL PERIMETER | 27' AIRSTREAM TRAILER

(not to scale, for general placement demonstration only)

Globetrotter / Rear Door

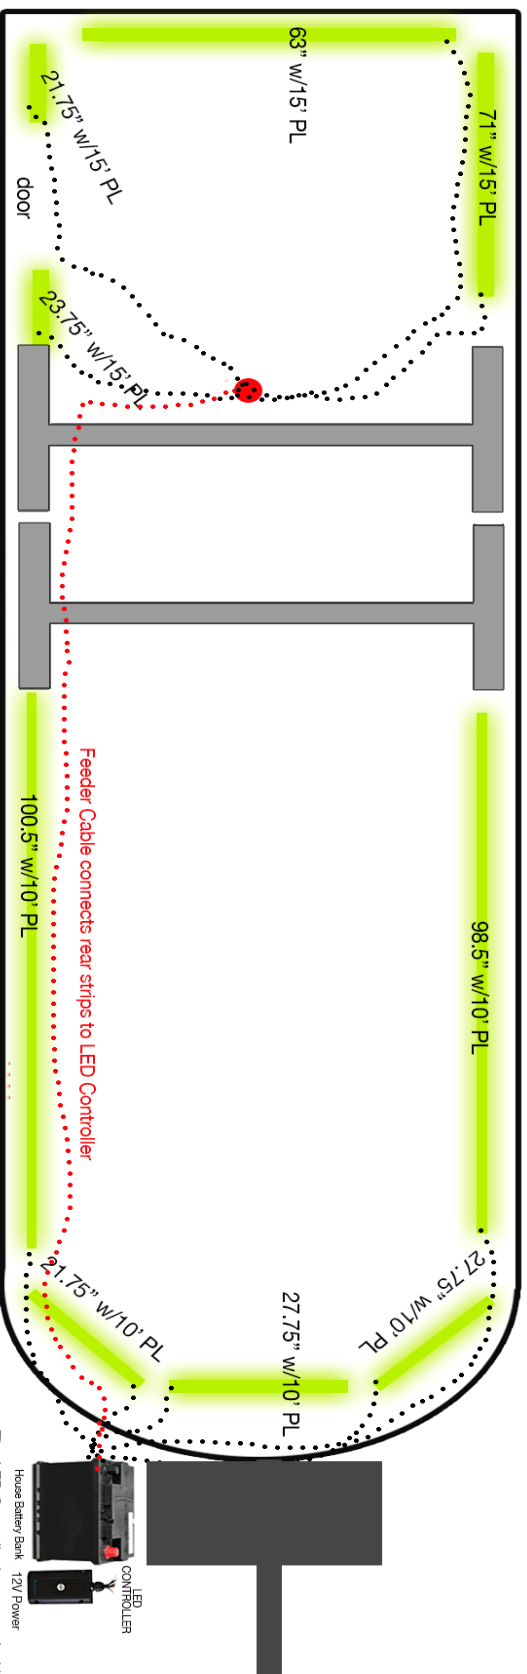

All power leads must run back to the Boogey Lights LED controller mounted at or near the 12vdc power source. We always recommend using the house batteries as the power source. **IMPORTANT! LED strips can not "daisy chain" from one strip to the next.** NOTE: LED Strips can be cut every third LED if you need shorter lengths.

## IF DUAL ZONE

ZONE 1: The trailer under-glow power leads are connected to zone 1.

ZONE 2: The rock-guard LEDs are connected to zone 2.

Not all models have the door at the rear like this 27' GLOBETROTTER. If your trailer doesn't, we can adjust the LED Lengths to fit. Contact us with your measurements for the passenger's side lengths.


3 September 2021



# UNDER-GLOW FULL PERIMETER | 28' AIRSTREAM TRAILER

## Forward Door

(not to scale, for general placement demonstration only)

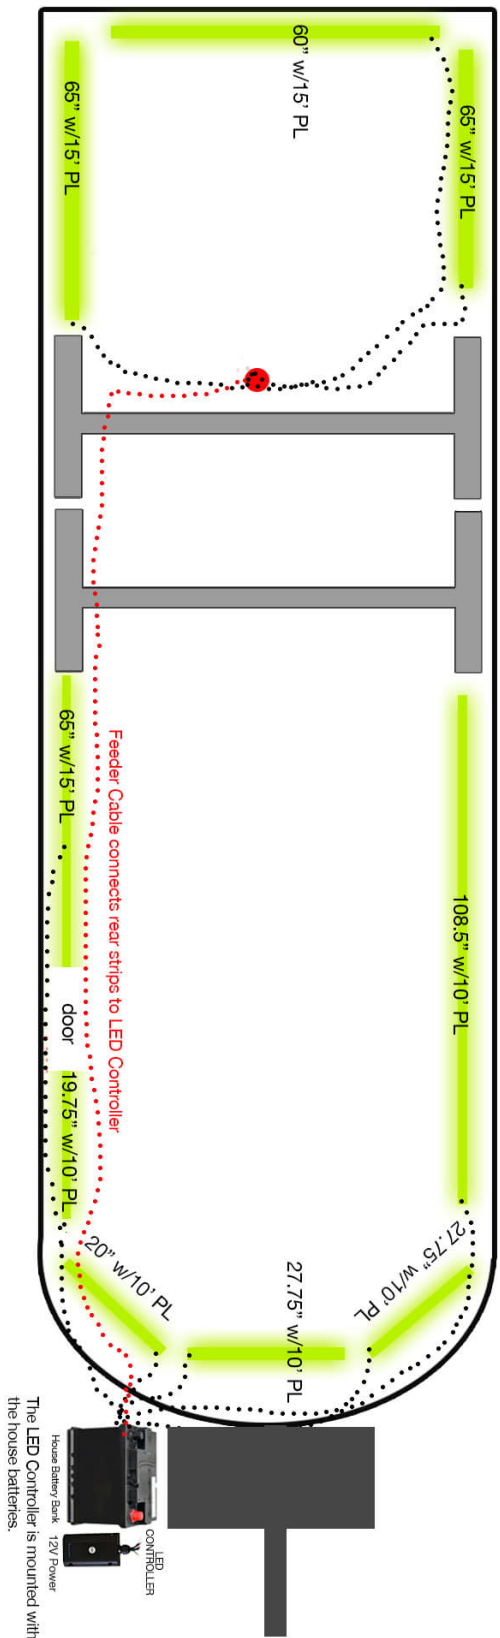

All power leads must run back to the Boogey Lights LED controller mounted at or near the 12Vdc power source. We always recommend using the house batteries as the power source. **IMPORTANT!** LED strips can not "daisy chain" from one strip to the next. NOTE: LED Strips can be cut every third LED if you need shorter lengths.

IF DUAL ZONE

ZONE 1: The trailer under-glow power leads are connected to zone 1.


ZONE 2: The rock-guard LEDs are connected to zone 2.

22 May 2025

# UNDER-GLOW FULL PERIMETER | 30' AIRSTREAM TRAILER

## Forward Door

(not to scale, for general placement demonstration only)

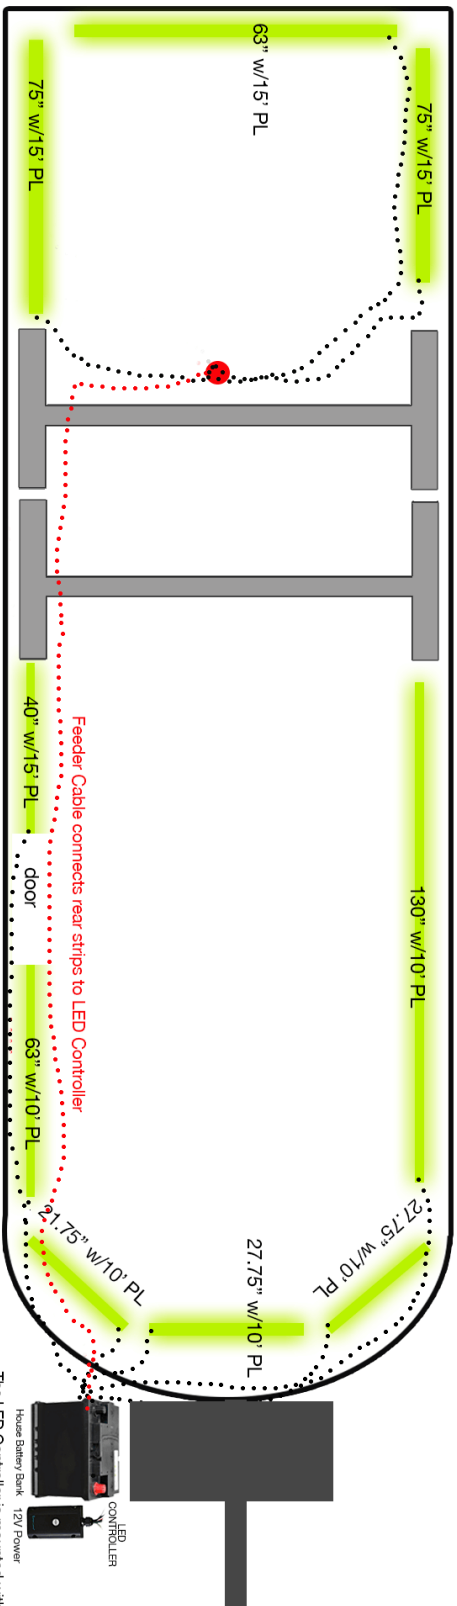

The LED Controller is mounted with the house batteries.

All power leads must run back to the Boogey Lights LED controller mounted at or near the 12vdc power source. We always recommend using the house batteries as the power source. **IMPORTANT!** LED strips can not "daisy chain" from one strip to the next. NOTE: LED Strips can be cut every third LED if you need shorter lengths.

IF DUAL ZONE

ZONE 1: The trailer under-glow power leads are connected to zone 1.

ZONE 2: The rock-guard LEDs are connected to zone 2.

Not all models have the door in the front like this 30' trailer. If your trailer doesn't, we can adjust the LED Lengths to fit. Contact us with your measurements for the passenger's side lengths.


18 November 2021

# UNDER-GLOW FULL PERIMETER | 33' AIRSTREAM TRAILER

## Forward Door



Bl-airstream-ug-072525

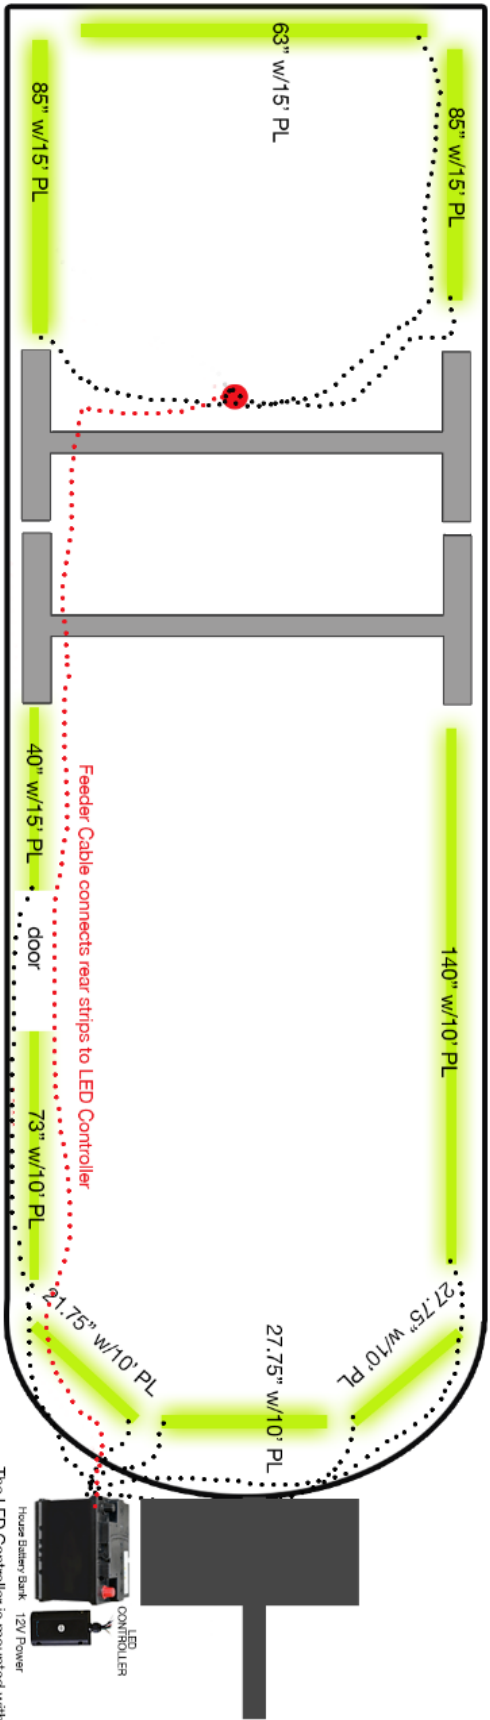

All power leads must run back to the Boogey Lights LED controller mounted at or near the 12vdc power source. We always recommend using the house batteries as the power source. **IMPORTANT!** LED strips can not "daisy chain" from one strip to the next. NOTE: LED Strips can be cut every third LED if you need shorter lengths.

### IF DUAL ZONE

ZONE 1: The trailer under-glow power leads are connected to zone 1.

ZONE 2: The rock-guard LEDs are connected to zone 2.

## ROCK GUARD

Mounting the LEDs on each Rock Guard requires that you first unbolt the non-hinged sides of the rock guard. It will swing outward like you see in our photo below which exposes the rear of the rock guard. Two of the LED strips can be mounted such that the power leads come out at the bottom of the rock guard where the hinge is located. The other two power leads however need to be secured to the rock guard using 3M VHB tape so they can then be routed down to the same location as the other two power leads. Be sure to prepare all surfaces using rubbing alcohol and 3M adhesion primer. Then, affix the 3M VHB tape to the rock guard. Finally, firmly press the power lead cable (wrapped in ¼" split-loom first) from the other two LED strips to the 3M VHB tape such that the power lead cables meet at the bottom of the rock guard, at the hinged edge. All four power leads can then be routed together to the LED controller.

### Rock Guard View Inside. Passenger's Side

