



INSTALLATION GUIDE

WESTERN STAR 57x GRILL & AIR VENT LED LIGHT KIT

IMPORTANT! No two installation scenarios are the same. Accent lighting is highly subjective. Not everyone shares the same lighting or installation quality goals. Some folks are OK with twisting wires together, others want to solder and heat shrink them. Some folks are OK with running wires where they may be seen or unprotected to save money/time, others want a tidy, clean install so they wrap plastic split-loom around all exposed cables. Some folks are OK with mounting their LED strips to whatever surface they can find, others want to take the time necessary to build out appropriate mounting surfaces to provide the best lighting effect on their vehicle and maximize the longevity of their lighting system. The point is it's not possible to provide all the materials necessary for all installation scenarios on all types of vehicles to meet everyone's quality goals. Our light kits provide the essential components needed for a high-quality, functioning lighting system. Installation of our light kit to your specific vehicle will however likely require additional items to make it look, fit and work the way you want. This is particularly the case with electrical wiring, switching functionality and mounting surfaces for the LED strips. We have created a list of additional items you may need. Here's the link: <https://www.boogeylights.com/other-items-you-might-need/> . While we offer them for sale you can also find these items locally. We urge you to review this information before starting your install.

BENCH TEST YOUR LIGHTING COMPONENTS FIRST!

We know this takes a few extra minutes, but we **STRONGLY** suggest you bench test your lights AND your controller / switches on a table before doing anything further. Test all of them. While we test every light strip and controller before shipping, bench testing your lights will eliminate the possibility of any problems with the lights or controller before mounting. It also lets you know everything is working properly. Also, the process of bench testing gives you an opportunity to understand the wiring system without interference from other wires, connectors and cables. You can use any 12vdc battery to do this (e.g. car battery, motorcycle battery, lawn tractor battery or 12vdc power supply). If you're not sure how to bench test, download this pdf: <https://docs.boogeylights.net/?wpdmdl=1305> . Bench testing takes an extra 10 or 15 minutes. It's simple to do and can potentially save you hours of time and frustration down the road.

Did we mention the importance of bench testing every LED strip and controller first?

THIS IS A GUIDE. NOT A HOW-TO. It's simply not possible to provide detailed instructions for all installation scenarios. Far too many variables. The information in this document is intended to be used as a guide. It is not a detailed step-by-step how-to installation manual. We do not spell out every single step along the way. We cover the essential steps related to installing this kit. Beyond that we assume the installer has the skills, knowledge and tools necessary to do the work using the information we provide as a guide. You may need to vary your installation and/or make adjustments based on your vehicle. This is particularly the case with led strip mounting locations, electrical wire routing, electrical connections, electrical load sizing and switching. If you're unsure about how to do the installation – particularly the electrical components – we urge you to seek assistance from someone who has those skills.

YOU MUST HAVE AN UNDERSTANDING OF 12V POWER. An essential skill with installation of any Boogey Lights LED products is knowing how to correctly wire the product to a 12vdc circuit. This includes understanding the importance of having a properly sized fuse at the power source, polarity, how to properly seal an electrical connection, using properly sized wire gauge for the load, measuring voltage and measuring the additional amperage draw you're adding. If you are uncertain or unfamiliar with any of these concepts, we urge you to ask someone who has the knowledge to assist you. Electricity is unforgiving.

MOUNTING SURFACE. How and where you mount your LED strips will for the most part determine the longevity of your lighting system. If you mount the LED strips to smooth, clean, continuous, straight, flat surfaces as we recommend, you can expect your lighting system to last for many years

SECURE THE POWER LEADS. Make sure the power lead wire that connects to one end of the LED strip is firmly secured to the boat. Do not allow that power lead to move or flex at the point where it attaches to the LED strip. If you do, it will fail prematurely and is not covered under warranty.

POWER LEADS. All of the power leads coming from the LED strips will need to be routed back to your power source/switch/controller which is usually mounted near the battery bank. We typically will mount the led controller in the driver's side storage box (aka 'jockey box'). If you're installing this kit along with another one of our light kits, you can usually merge the wiring together. It's important these power lead be secured (especially at the point where the power lead attaches to the LED strip) and wrapped in split loom to prevent chafing.

RGB/MULTI-COLOR KIT Installations

Installation of this led light kit takes 3 to 5 hours depending on whether or not you're adding this light kit to an existing installation or installing this kit as a stand-alone. If the LED Controller is already installed with another kit, this kit will simply tie into that controller. If you need to also install the LED Controller, it will take additional time to do this. Wiring diagram is included at the end of the guide.

SINGLE COLOR KIT Installations

Installation of our single color kit typically takes 2 to 4 hours. With single color installations we always recommend using a dedicated on/off switch OR if you want to tie them into an existing circuit (e.g. marker lights), we suggest adding a relay to the circuit. If you purchased any of the on/off wireless switches we offer, you do not need a relay provided the grill lights (and/or optional air vent lights) in this kit are the only lights you're switching on it. The single color on/off wiring diagram is included at the end of this guide.

Know your Power Consumption

Regardless of which switching mechanism you're using, it's important to be mindful of the amount of amperage you're drawing through your lighting circuit and not exceed the circuit component limitations. The amount of power (amps) you're pulling through the circuit will vary based on a combination of three factors: 1) The number of LEDs in the circuit, 2) the amount of copper wire in the circuit and 3) the input voltage to the circuit. It's important to keep in mind that the amperage ratings for the switches/controllers/LEDs assume 12.5 vdc input voltage. If you're wiring your lights to a vehicle that has a charging mechanism (e.g. alternator), the input voltage will likely increase when the engine is on; particularly as RPMs increase. It's not unusual for an alternator to charge the battery at a rate of 13.5 to 14 vdc depending upon the vehicle. Increasing the input voltage to the LED Controller/LEDs will also increase the amperage draw of those LEDs because they'll burn brighter. For example, we've seen circuits that draw 17 amps when the engine is off and the input voltage is 12.5vdc but jump up to drawing 24 amps when the engine is on and RPMs increased. This is because the input voltage jumps to 14vdc when the engine is running. This is why we strongly suggest measuring actual amperage drawn for your particular installation to make sure it's fused and wired appropriately. If you are not familiar with DC electricity and how to measure both voltage and amperage draw, we urge you to seek the assistance of someone who does. Improperly sized circuits can cause fires and/or damage other electrical systems in your vehicle.

LED MOUNTING LOCATIONS

There are a possible total of three mounting locations in this kit (grill, driver air vent, passenger air vent). All of the power leads need to be carefully run over to the driver's side frame rail and back to the battery bank area on the driver's side. You will need to remove each of the air vents but can usually access the grill from the inside of the hood. If you're installing an LED controller or other wireless switching control with this kit, you'll need to remove the driver's side steps to access the batteries. Also, the LED controller is mounted in the driver's side storage / jockey box. You will need to drill a hole in the floor of that box to connect power to the battery box, led wires and antenna.

Grill Area:

You'll need to open the hood to gain access to the inside of the grill. For the Western Star the way the grill is designed requires each of four LED strips to be mounted vertically on the braces inside the grill. Here's a photo:




The power lead for each LED strip should face downward where all four of them can be wired together and then run back to their power supply (controller, etc). It's important the mounting surface be properly prepared by removing all grease/dirt/oil with rubbing alcohol. Then, apply the 3M promoter to the mounting surface before attaching the LED strips. More detail on this process is included later on in this guide. The power lead needs to be encased in split loom which then needs to run up the driver's side frame rail to the battery box or LED controller depending on your configuration. Before doing this though we recommend you install the air vents next so you can connect the air vent power leads with the grill power lead and then run just one power lead cable back to the battery box/led controller.

Make sure the power lead is routed in such a way that it isn't pinched by the hood closing, chaffing or mounted too close to the engine or other extremely hot surfaces.


Air Vents:

You'll first need to remove the two air vents on each side of the hood. We found it easier to do this when the hood was closed. Next, open the hood and remove the two black plastic splash guards on each side of the truck. This will give you room to get under the air vent plenum. Next, you'll need to drill a ¼" hole at the base of each air vent compartment. We like to put down a piece of Gorilla tape before drilling into fiberglass. Helps reduce splintering. Once you've drilled the ¼" hole on each air vent, you'll need to "fish" the power lead wire through that hole you just drilled. We found it easier to accomplish this by first pushing a coat hanger (or similar "fish tape" like wire) up from the hole we just drilled so it comes out the air vent in the hood (or at least within reach of your hand from inside the vent). Then, temporarily tape the led power lead to that fish tape/coat hanger and pull it back through the hole you just drilled. At this point you're ready to mount the LED strips to the inside of the air vent. When mounting the strips, mounting them against the outside wall from inside the vent such that the light coming from the LED strip is facing inward. We mount one led strip on top of the vent and one on the bottom as shown here:

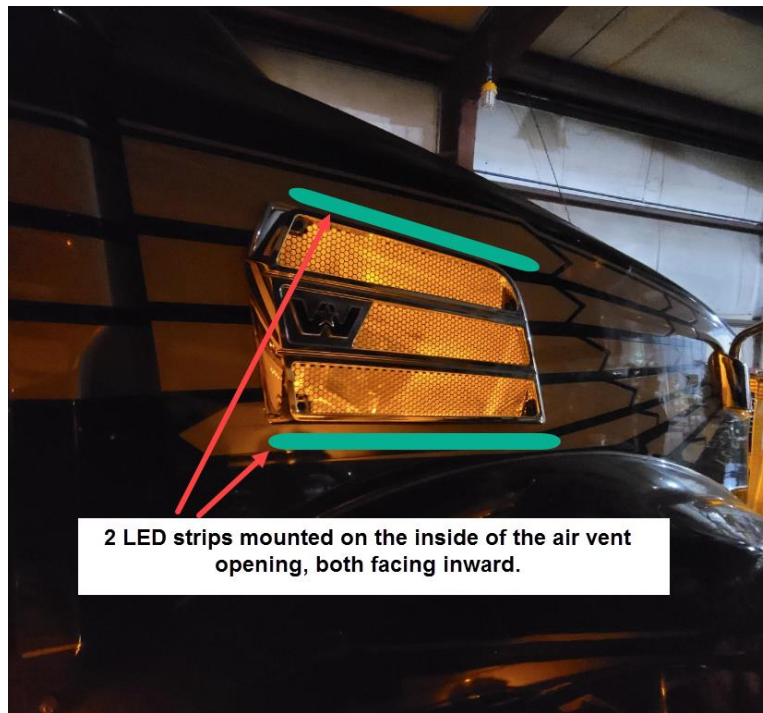

You'll notice that each LED strip has it's own power lead. We prefer to wire them together inside the air vent and then fish a single power lead out of the air vent under the hood. This way you are drilling a smaller hole in the bottom of the hood. That said, you could just as easily fish both power leads through the hood too. Just be aware however that doing so requires a larger hole be drilled in the bottom of the hood so both power leads can be fished through that hole. It's up to you. Either way, be sure to seal around that hole and power leads with some butyl tape which we include in the kit. It's important that hole be air tight. Also, we suggest using some zip tie mounts on the inside of the hood to secure the power lead against the hood so they don't flop around.

CUTTING YOUR LEDS- If you need to cut your LED strip you can do so as long as you cut in the proper location – which is every three LEDs as shown in the below photo. Cutting incorrectly could damage your lights and is not covered by the warranty. If you cut the strip, be sure to use the included heat shrink tubing to seal the cut end. You can also use silicone found at your local hardware or RV store. If you do need to cut your LED strip, we strongly suggest doing so BEFORE you mount the strip.

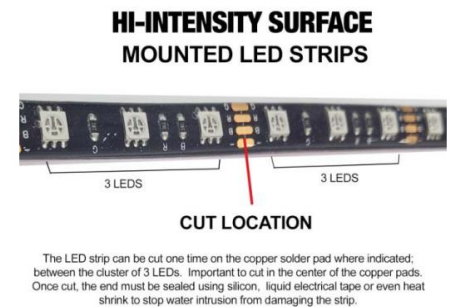

Follow these steps for mounting your LED strips:

- The area where you are mounting the LEDs has to be clean: free of all dirt, oil or anything that might affect the LED from sticking. You only get one opportunity to mount the LEDs so it's critical the area be prepared properly.
- Use the supplied alcohol pads to clean the area where you are going to mount the LED strip. Be sure to let the alcohol dry completely before proceeding to the next step. (Note: Do not use acetone or similar cleaner).
- Next, use the 3M Adhesion Promoter supplied with your kit to "paint" on the promoter where you are going to mount the LED strip. ***This is an important step. Do not bypass.*** Allow the promoter to dry for 60-90 seconds.
- Peel off the red backing tape that protects the 3M adhesive tape on your LED strip. Be careful not to let the tape touch anything. The 3M backing tape on these LED strips are one-use only. They cannot be reused.
- Carefully push the LED strip to the area you have prepared. You will want to apply only enough pressure to the strip to make sure it is firmly mounted. *You only get one opportunity to do this.* Once the LED strip touches a properly prepared surface that has been promoted, that LED strip will be very difficult to remove. Moreover, if you do remove the LED strip, the strip cannot be used again without adding another layer of 3M adhesive tape to the back. **DO NOT press too hard as too much pressure can damage the LEDs and connecting wires in the strip.** Also, do not pull, stretch or twist the LED strip. Too much tension on the strip will also damage the LEDs such that some of the LEDs in the strip will not illuminate. The strip must be mounted flat against a single continuous mounting surface, in a straight line. Really important that the ENTIRE STRIP be stuck to the mounting surface and that you NOT attempt to span across multiple mounting surfaces.

Do NOT bend the LED strip in a radius of less than 2 inches.






Do NOT bend the LED strip on a horizontal plane.



INSTALLATION PHOTOS

Here are some photos with comments on the installation we did in building this kit. We've commented on key parts of the installation along the way. NOTE: These photos are from our Freightliner Cascadia installation kit but the process is the same for the Western Star.

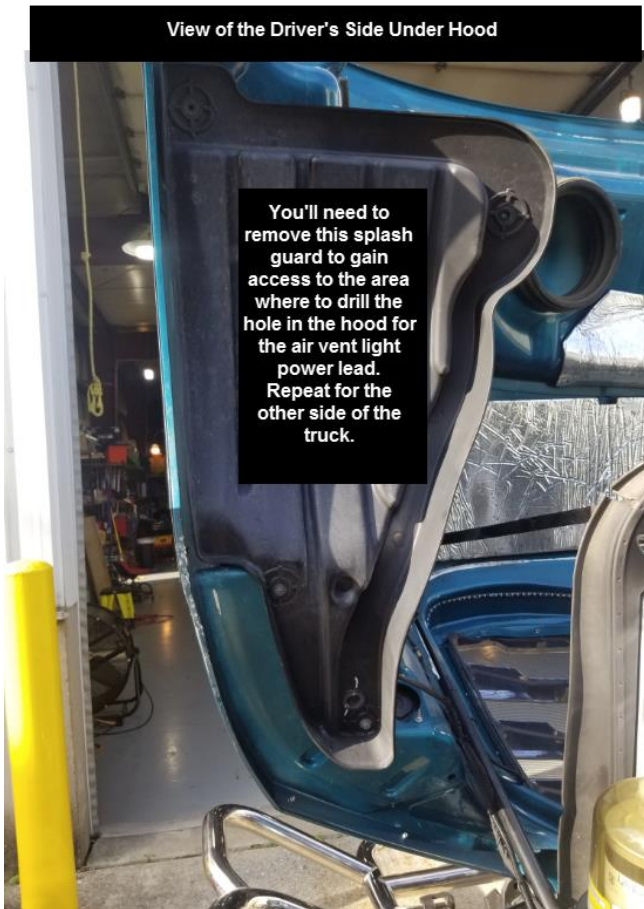

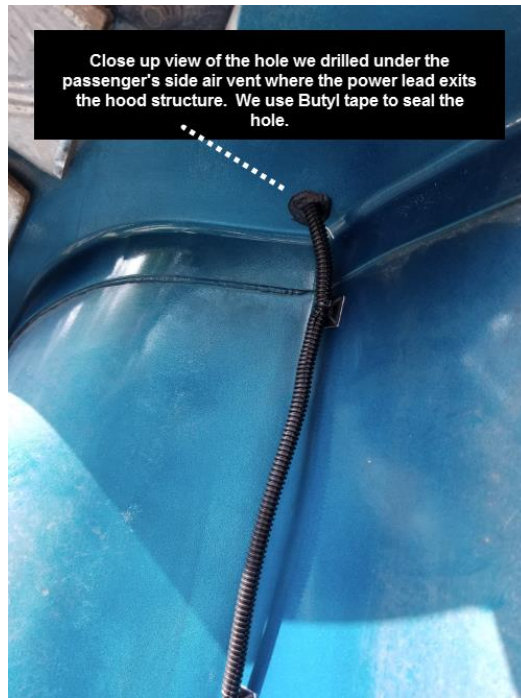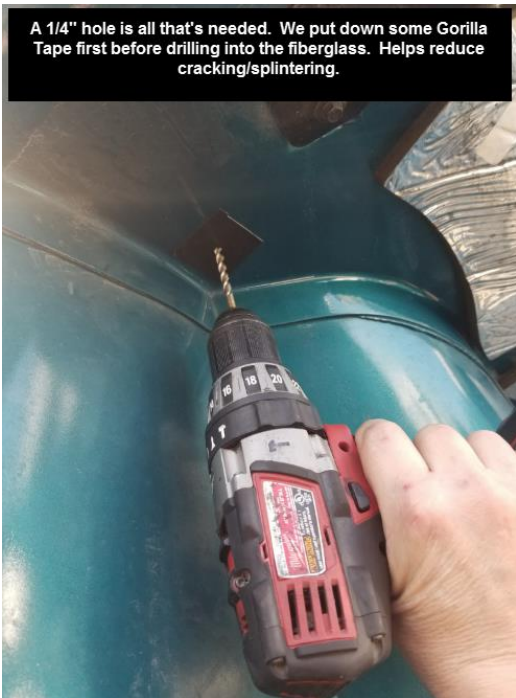

NOTE: The photos here are of our HEAVY DUTY LED CONTROLLER which is used for large LED installations which typically include Under-Glow and/or Under-Cab lighting systems. For the Western Star Grill and Air Vent kit, you won't have an LED controller this large.

Additional Resources

- Product Page: <https://www.boogeylights.com/western-star-led-light-kit/>
- How to Videos: <https://www.boogeylights.com/how-to-videos/>
- Troubleshooting: <https://www.boogeylights.com/trouble-shooting-guide/>
- Installation Resources: <https://www.boogeylights.com/installation-resources/>
- How to Bench Test: <https://docs.boogeylights.net/?wpdmdl=1305>
- Amperage Data: <https://docs.boogeylights.net/?wpdmdl=1137>
- Cutting Your LEDs: <https://docs.boogeylights.net/?wpdmdl=964>
- GEN2 LED Controller Wiring Diagrams + Operating Info: <https://docs.boogeylights.net/?wpdmdl=1163>
- GEN2 RF Wireless Remote Operating Info: <https://docs.boogeylights.net/?wpdmdl=1164>
- GEN2 Bluetooth APP Operating Info: <https://docs.boogeylights.net/?wpdmdl=1169>
- GEN2 Bluetooth APP Quick-Start: <https://docs.boogeylights.net/?wpdmdl=1167>

Support

- Phone: 800.847.1359 (M-F, 9-6 Eastern)
- Text: 859.955.8155
- Open a Support Ticket: <https://www.boogeylights.com/email-us/>
- Online: 24/7 resources at <https://www.boogeylights.com/installation-resources/>
- How to Make a Warranty Claim: <https://www.boogeylights.com/make-a-warranty-claim/>

Warranty

The Boogey Lights® warranty requires an original sales receipt from Boogey Lights or an authorized dealer. It covers product replacement only, not labor or other costs. Register your purchase at: <https://www.boogeylights.com/warranty-registration/>. Full details: <https://www.boogeylights.com/warranty/>.