



## INSTALLATION GUIDE

### Corvette C8 Mid-Engine LED Light Kit

**IMPORTANT!** No two installation scenarios are the same. Accent lighting is highly subjective. Not everyone shares the same lighting or installation quality goals. Some folks are OK with twisting wires together, others want to solder and heat shrink them. Some folks are OK with running wires where they may be seen or unprotected to save money/time, others want a tidy, clean install so they wrap plastic split-loom around all exposed cables. Some folks are OK with mounting their LED strips to whatever surface they can find, others want to take the time necessary to build out appropriate mounting surfaces to provide the best lighting effect on their vehicle and maximize the longevity of their lighting system. The point is it's not possible to provide all the materials necessary for all installation scenarios on all types of vehicles to meet everyone's quality goals. Our light kits provide the essential components needed for a high-quality, functioning lighting system. Installation of our light kit to your specific vehicle will however likely require additional items to make it look, fit and work the way you want. This is particularly the case with electrical wiring, switching functionality and mounting surfaces for the LED strips. We have created a list of additional items you may need. Here's the link: <https://www.boogeylights.com/other-items-you-might-need/> . While we offer them for sale you can also find these items locally. We urge you to review this information before starting your install.

#### **BENCH TEST YOUR LIGHTING COMPONENTS FIRST!**

We know this takes a few extra minutes, but we **STRONGLY** suggest you bench test your lights AND your controller / switches on a table before doing anything further. Test all of them. While we test every light strip and controller before shipping, bench testing your lights will eliminate the possibility of any problems with the lights or controller before mounting. It also lets you know everything is working properly. Also, the process of bench testing gives you an opportunity to understand the wiring system without interference from other wires, connectors and cables. You can use any 12vdc battery to do this (e.g. car battery, motorcycle battery, lawn tractor battery or 12vdc power supply). If you're not sure how to bench test, download this pdf: <https://docs.boogeylights.net/?wpdmdl=1305> . We also have a video: <https://www.boogeylights.com/how-to-bench-test/> . Bench testing takes an extra 10 or 15 minutes. It's simple to do and can potentially save you hours of time and frustration down the road.

**Did we mention the importance of bench testing every LED strip and controller first?**

**THIS IS A GUIDE. NOT A HOW-TO.** It's simply not possible to provide detailed instructions for all installation scenarios. Far too many variables. The information in this manual is intended to be used as a guide. It is not a detailed step-by-step how-to installation manual. We do not spell out every single step along the way. We cover the essential steps related to installing this kit. Beyond that we assume the installer has the skills, knowledge and tools necessary to do the work using the information we provide here as a guide. You may need to vary your installation and/or make adjustments based on your vehicle. If you're unsure about how to do the installation – particularly the electrical components – we urge you to seek assistance from someone who has those skills.

**YOU MUST HAVE AN UNDERSTANDING OF 12V POWER.** An essential skill with installation of any Boogey Lights LED product is knowing how to correctly wire the product to a 12vdc circuit. This includes understanding the importance of having a properly sized fuse at the power source, polarity, how to properly seal an electrical connection, using properly sized wire gauge for the load, measuring voltage and measuring the additional amperage draw you're adding. If you are uncertain or unfamiliar with any of these concepts, we urge you to ask someone who has the knowledge to assist you. Electricity is unforgiving.

**3M TAPE & ADHESION PRIMER.** All Boogey Lights® LED strips have 3M Tape backing affixed to them. This 3M Tape is designed to make a more-or-less permanent bond between the LED strip and the mounting surface. When properly prepared, 3M Tape can be affixed to polyethylene, polypropylene, ABS, PET/PBT blends, concrete, wood, glass, metal and painted metal surfaces. To make this bond you must prepare the mounting surface. You do this by first cleaning the surface with isopropyl alcohol (50/50 mixture with water) and then painting on 3M Adhesion Primer. **YOU CANNOT SKIP THIS STEP.** The promoter acts as a primer that ensures maximum adhesion. Our lighting kits include a small bottle of 3M Adhesion Primer. Simply use a clean, dry cloth to apply it to the mounting surface.

Using Acetone on Heavy Oiled or Greasy Surfaces. For situations where you are affixing Boogey Lights® to a surface where heavy oils or grease are present, a "degreaser" solvent such as acetone may need to be used first. If you use acetone (or any other degreasing solvent) you must still apply the 3M Promoter. Acetone is not a replacement for primer. In addition, if you use acetone to clean a heavy oiled or greased surface, you must follow up with an alcohol cleaning to help ensure any residue or film from the acetone is removed. This is because acetone (and most other degreasing solvents) will thin the promoter as well as break down the adhesive in the tape greatly reducing the tape's stickiness. Any surface first cleaned with acetone must also be cleaned with alcohol and then thoroughly dried before painting on promoter.


## **INSTALLATION LOCATIONS**

The kit includes the following six Low Profile LED strips for a total of 126 LEDs:

- 3 - 12" (18 LEDs each) with a 5' power lead
- 3 - 15.75" (24 LEDs each) with a 5' power lead

Below is a diagram of where we installed these 6 LED strips on this C8. Nothing says you have to do the same as long as the strips are installed on a smooth flat surface. The idea is to mount the LED strips in a way that only the glow from the LEDs can be seen; not the LED strips themselves. The power leads

from each LED strip will need to be routed to wherever you mount the LED controller or switch. We mounted our controller next to the battery as we always prefer to mount the LED controller as close to the power source as we can. That way we do not have to run long runs of 12vdc power. 12vdc power drops quickly over short distances. All of the power leads from the LEDs come together as one and are extended up to the battery using 18awg feeder cable where it connects to the controller.

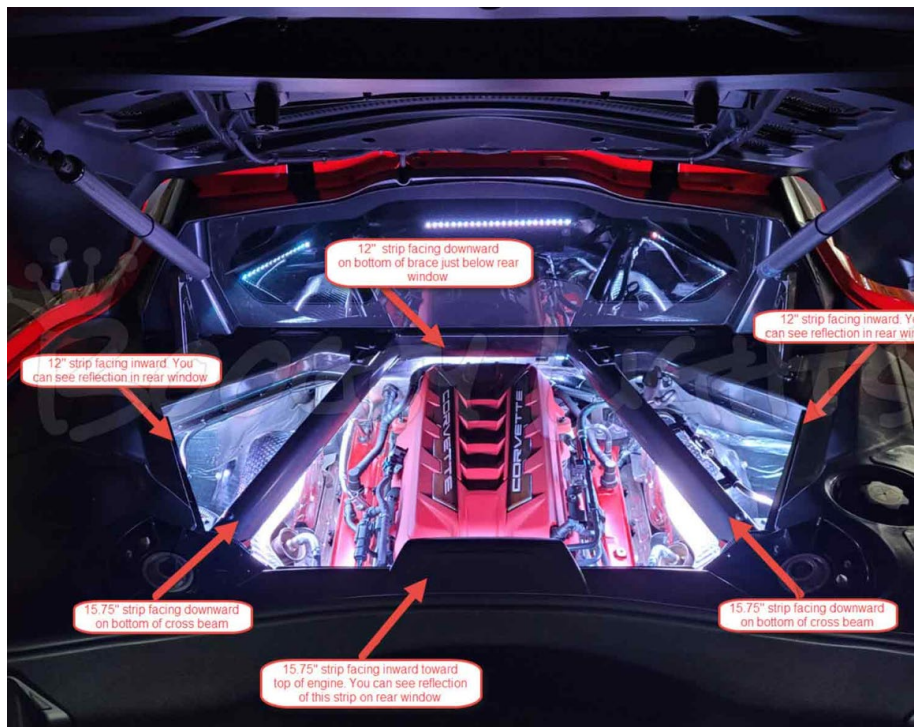

## MOUNTING THE LED CONTROLLER


For multi-color installations there is an LED controller. We like to install the LED controller as close to the battery as possible. This photo shows how we did it. The controller is about 12" away from the battery. The shorter the distance, the better since 12vdc power drops quickly over short distances with copper wire. Installing the controller here also makes it easier to route the power lead wires coming up from the bottom of the car.



## CUTTING YOUR LEDS

If you need to cut your LED strip you can do so as long as you cut in the proper location – which is every three LEDs as shown in the below photo. Cutting incorrectly could damage your lights and is not covered by the warranty. If you cut the strip, be sure to seal the cut end. You can also use silicone found at your local hardware store. If you do need to cut your LED strip, we strongly suggest doing so BEFORE you mount the strip to your car.

## HI-INTENSITY SURFACE MOUNTED LED STRIPS

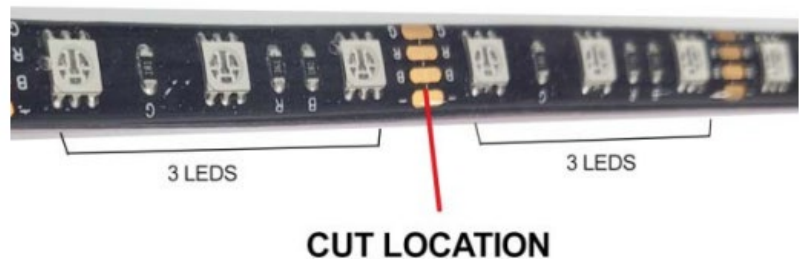

The LED strip can be cut one time on the copper solder pad where indicated; between the cluster of 3 LEDs. Important to cut in the center of the copper pads. Once cut, the end must be sealed using silicon, liquid electrical tape or even heat shrink to stop water intrusion from damaging the strip.

## MOUNTING THE LED STRIPS

Follow these steps for mounting your LED strips:

- The area where you are mounting the LEDs has to be clean: free of all dirt, oil or anything that might affect the LED from sticking. You only get one opportunity to mount the LEDs so it's critical the area be prepared properly.
- Use rubbing alcohol to clean the area where you are going to mount the LED strip. Be sure to let the alcohol dry completely before proceeding to the next step. (Note: Do not use acetone or similar cleaner).
- Next, use the 3M Adhesion Promoter supplied with your kit to "paint" on the promoter where you are going to mount the LED strip. **This is an important step. Do not bypass.** Allow the promoter to dry for 60-90 seconds.
- Peel off the red backing tape that protects the 3M adhesive tape on your LED strip. Be careful not to let the tape touch anything. The 3M backing tape on these LED strips are one-use only. They cannot be reused.

Do NOT bend the LED strip in a radius of less than 2 inches.



Do NOT bend the LED strip on a horizontal plane.



Carefully push the LED strip to the area you have prepared. You will want to apply only enough pressure to the strip to make sure it is firmly mounted. *You only get one opportunity to do this.* Once the LED strip touches a properly prepared surface that has been promoted, that LED strip will be very difficult to remove. Moreover, if you do remove the LED strip, the strip cannot be used again without adding another layer of 3M adhesive tape to the back. DO NOT press too hard as too much pressure can damage the LEDs and connecting wires in the strip. Also, do not pull, stretch or twist the LED strip. Too much tension on the strip will also damage the LEDs such that some of the LEDs in the strip will not illuminate. The strip must be mounted flat against a single continuous mounting surface, in a straight line. Really important that the ENTIRE STRIP be stuck to the mounting surface and that you NOT attempt to span across multiple mounting surfaces.

**Secure the power lead firmly to the mounting surface.** Do not allow it to move at or near the point where the power lead attaches to the led strip. This is very important. If you do, the led strip will almost certainly fail prematurely at or near that point. The LED strip is not designed to withstand the constant movement, flexing or vibration of a power lead that is not secured firmly to the mounting surface. The vibration and movement of the vehicle going down the road combined with the weight of that power lead moving around will cause the LED strip to fail.

## Additional Resources

- Product Page: <https://www.boogeylights.com/corvette-c8-mid-engine-led-light-kit/>
- How to Videos: <https://www.boogeylights.com/how-to-videos/>
- Troubleshooting: <https://www.boogeylights.com/trouble-shooting-guide/>
- Installation Resources: <https://www.boogeylights.com/installation-resources/>
- How to Bench Test: <https://docs.boogeylights.net/?wpdmdl=1305>
- Amperage Data: <https://docs.boogeylights.net/?wpdmdl=1137>
- Quick Search: <https://www.boogeylights.com/quick-find/>
- Relay Wiring Diagram: <https://docs.boogeylights.net/?wpdmdl=1145>
- GEN2 LED Controller Wiring Diagrams + Operating Info: <https://docs.boogeylights.net/?wpdmdl=1163>
- GEN2 RF Wireless Remote Operating Info: <https://docs.boogeylights.net/?wpdmdl=1164>
- GEN2 Bluetooth APP Operating Info: <https://docs.boogeylights.net/?wpdmdl=1169>
- GEN2 Bluetooth APP Quick-Start: <https://docs.boogeylights.net/?wpdmdl=1167>

## Support

- Phone: 800.847.1359 (M-F, 9-6 Eastern)
- Text: 859.955.8155
- Open a Support Ticket: <https://www.boogeylights.com/email-us/>
- Online: 24/7 resources at <https://www.boogeylights.com/installation-resources/>
- How to Make a Warranty Claim: <https://www.boogeylights.com/make-a-warranty-claim/>

## Warranty

The Boogey Lights® warranty requires an original sales receipt from Boogey Lights or an authorized dealer. It covers product replacement only, not labor or other costs. Full details: <https://www.boogeylights.com/warranty/>.