

INSTALLATION GUIDE

HORSE TRAILER Under-Glow w/Optional Gooseneck Light Kit

IMPORTANT! No two installation scenarios are the same. Accent lighting is highly subjective. Not everyone shares the same lighting or installation quality goals. Some folks are OK with twisting wires together, others want to solder and heat shrink them. Some folks are OK with running wires where they may be seen or unprotected to save money/time, others want a tidy, clean install so they wrap plastic split-loom around all exposed cables. Some folks are OK with mounting their LED strips to whatever surface they can find, others want to take the time necessary to build out appropriate mounting surfaces to provide the best lighting effect on their vehicle and maximize the longevity of their lighting system. The point is it's not possible to provide all the materials necessary for all installation scenarios on all types of vehicles to meet everyone's quality goals. Our light kits provide the essential components needed for a high-quality, functioning lighting system. Installation of our light kit to your specific vehicle will however likely require additional items to make it look, fit and work the way you want. This is particularly the case with electrical wiring, switching functionality and mounting surfaces for the LED strips. We have created a list of additional items you may need. Here's the link: https://www.boogeylights.com/other-items-you-might-need/. While we offer them for sale you can also find these items locally. We urge you to review this information before starting your install.

BENCH TEST YOUR LIGHTING COMPONENTS FIRST!

We know this takes a few extra minutes, but we STRONGLY suggest you bench test your lights AND your controller / switches on a table before doing anything further. Test all of them. While we test every light strip and controller before shipping, bench testing your lights will eliminate the possibility of any problems with the lights or controller before mounting. It also lets you know everything is working properly. Also, the process of bench testing gives you an opportunity to understand the wiring system without interference from other wires, connectors and cables. You can use any good 12vdc battery to do this (e.g. car battery, motorcycle battery, lawn tractor battery or 12vdc power supply capable of supporting a 5 amp load). If you're not sure how to do this, we have prepared a document explaining the process here: https://docs.boogeylights.net/?wpdmdl=1305. Bench testing takes an extra 10 or 15 minutes. It's simple to do and can potentially save you hours of time and frustration down the road.

Did we mention the importance of bench testing every LED strip and controller before installing?

BEFORE YOU START

THIS IS A GUIDE. NOT A HOW-TO. It's simply not possible to provide detailed instructions for all installation scenarios. Far too many variables. The information in this manual is intended to be used as a guide. It is not a detailed step-by-step how-to installation manual. We do not spell out every single step along the way. We cover the essential steps related to installing this kit. Beyond that we assume the installer has the skills, knowledge and tools necessary to do the work using the information we provide as a guide. You may need to vary your installation and/or make adjustments based on your truck. This is particularly the case with electrical wire routing, electrical connections, electrical load sizing and switching. If you're unsure about how to do the installation – particularly the electrical components – we urge you to seek assistance from someone who has those skills.

YOU MUST HAVE AN UNDERSTANDING OF 12V POWER. An essential skill with installation of any Boogey Lights LED products is knowing how to correctly wire the product to a 12vdc circuit. This includes understanding the importance of having a properly sized fuse at the power source, polarity, how to properly seal an electrical connection, using properly sized wire gauge for the load, measuring voltage and measuring the additional amperage draw you're adding. If you are uncertain or unfamiliar with any of these concepts, we urge you to ask someone who has the knowledge to assist you. Electricity is unforgiving.

WORK AREA. Make sure you have ample area in which to work and that the area is protected from rain or cold temperatures. The 3M adhesive tape and 3M adhesion promoter works best if applied when the air temperature is above 40 degrees (and of course is DRY).

KNOW YOUR AMPERAGE DRAW. Pay attention to the number of LEDs you are lighting and the total amps you will be drawing. We manufacture a number of LED Controllers of varying capacities. If you over-load the LED controller, it will either not work at all or the lights will dim in a short period of time. Amperage data for all our LED products are on each product page. You can also download it directly here: https://docs.boogeylights.net/?wpdmdl=1137

MOUNTING & PLACEMENT | PLANNING YOUR INSTALL

For the trailer under-glow portion there are eight different mounting locations in this kit and all of the power leads need to be carefully run up to the front of the trailer where we mount our LED controller. In some cases it might be necessary to add some aluminum flat bar if the bottom of your trailer doesn't have a suitable smooth, flat mounting surface. If you're adding the gooseneck lights, there are four additional LED strips that need to be mounted under the gooseneck area. The LED strips mounted under the trailer are typically wired to ZONE 1 on the LED controller. The gooseneck area LED strips are typically wired to ZONE 2 on the LED Controller. See diagrams below for placement.

TRAILER UNDER-GLOW:

- 2 16' LED strips w/15' power leads
- 2 8' LED strips w/15' power leads
- 2 4' LED strips w/15' power leads
- 2 2' LED strips w/15' power leads

GOOSENECK UNDER-GLOW (optional):

- 1 6' LED strip w/10' power lead
- 1 4' LED strip w/10' power lead
- 2 2' LED strips w/10' power lead

The LED controller is mounted on the wall underneath the gooseneck. This is usually where the house batteries are located.



CUTTING YOUR LEDS

If you need to cut your LED strip you can do so as long as you cut in the proper location – which is every three LEDs as shown in the below photo. Cutting incorrectly could damage your lights and is not covered by the warranty. If you cut the strip, be sure to use heat shrink tubing or silicon to seal the cut end. If you do need to cut your LED strip, we strongly suggest doing so BEFORE you mount the strip.


HI-INTENSITY SURFACE MOUNTED LED STRIPS



The LED strip can be cut one time on the copper solder pad where indicated; between the cluster of 3 LEDs. Important to cut in the center of the copper pads. Once cut, the end must be sealed using silicon, liquid electrical tape or even heat shrink to stop water intrusion from damaging the strip.

LED PLACEMENT

These are the LED placement locations we used for this kit. It's important to follow this placement pattern to ensure the LED strips are protected. Mounting them in any other way voids warranty.

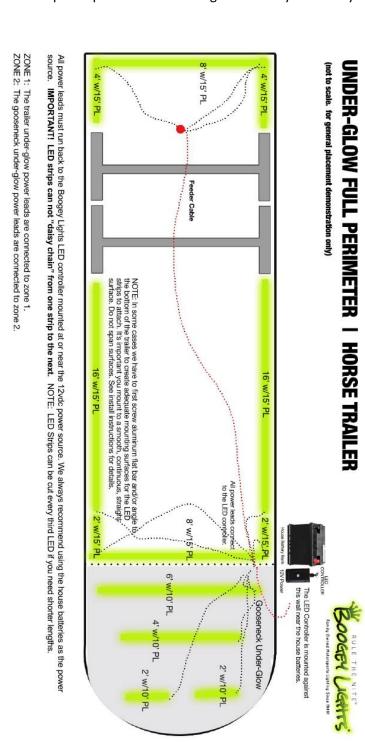

MOUNTING YOUR LED STRIPS

Follow these steps for mounting your LED strips:

- The area where you are mounting the LEDs has to be clean: free of all dirt, oil or anything that might affect the LED from sticking. You only get one opportunity to mount the LEDs so it's critical the area be prepared properly.
- Use rubbing alcohol to clean the area where you are going to mount the LED strip. Be sure to let the alcohol dry completely before proceeding to the next step. (Note: Do not use acetone or similar cleaner).

If the area is especially greasy, you'll need to clean it with a degreaser or similar solvent. IF you do, be sure to use rubbing alcohol on the surface next to completely remove any left-over residue from the degreaser.

- Next, use the 3M Adhesion Promoter supplied with your kit to "paint" on the promoter where you are going to mount the LED strip. *This is an important step. Do not bypass.* Allow the promoter to dry for 60-90 seconds.
- Peel off the red backing tape that protects the 3M adhesive tape on your LED strip. Be careful not to let the tape touch anything. The 3M backing tape on these LED strips are one-use only. They cannot be reused.

Carefully push the LED strip to the area you have prepared. You will want to apply only enough pressure to the strip to make sure it is firmly mounted. *You only get one opportunity to do this.* Once the LED strip touches a properly prepared surface that has been promoted, that LED strip will be very difficult to remove. Moreover, if you do remove the LED strip, the strip cannot be used again without adding another layer of 3M adhesive tape to the back. DO NOT press too hard as too much pressure can damage the LEDs and connecting wires in the strip. Also, do not pull, stretch or twist the LED strip. Too much tension on the strip will also damage the LEDs such that some of the LEDs in the strip will not illuminate. The strip must be mounted flat against a single continuous mounting surface, in a straight line. Really important that the ENTIRE STRIP be stuck to the mounting surface and that you NOT attempt to span across multiple mounting surfaces.

Do NOT bend the LED strip in a radius of less than 2 inches.





Do NOT bend the LED strip on a horizontal plane.



Additional Resources

- Product Page: https://www.boogeylights.com/horse-trailer-under-glow-light-kit/
- How to Videos: https://www.boogeylights.com/how-to-videos/
- Building a mounting surface: https://www.boogeylights.com/video-creating-a-smooth-mounting-surface/
- Using Aluminum Channels https://docs.boogeylights.net/?wpdmdl=1351
- General installation: https://www.boogeylights.com/video-how-to-install-a-boogey-lights-multi-color-under-glow-led-light-kit/
- Troubleshooting: https://www.boogeylights.com/trouble-shooting-guide/
- Installation Resources: https://www.boogeylights.com/installation-resources/
- GEN2 LED Controller Wiring Diagrams + Operating Info: https://docs.boogeylights.net/?wpdmdl=1163
- GEN2 RF Wireless Remote Operating Info: https://docs.boogeylights.net/?wpdmdl=1164
- GEN2 Bluetooth APP Operating Info: https://docs.boogeylights.net/?wpdmdl=1169
- GEN2 Bluetooth APP Quick-Start: https://docs.boogeylights.net/?wpdmdl=1167
- Amperage Data: https://docs.boogeylights.net/?wpdmdl=1137

Support

- Phone: 800.847.1359 (M-F, 9-6 Eastern)
- Text: 859.955.8155
- Open a Support Ticket: https://www.boogeylights.com/email-us/
- Online: 24/7 resources at https://www.boogeylights.com/installation-resources/
- How to Make a Warranty Claim: https://www.boogeylights.com/make-a-warranty-claim/

Warranty

The Boogey Lights® warranty requires an original sales receipt from Boogey Lights or an authorized dealer. It covers product replacement only, not labor or other costs. Register your purchase at: https://www.boogeylights.com/warranty-registration/. Full details: https://www.boogeylights.com/warranty/.